


VILP-128 HIGH VACUUM HIGH FLOW

- AIR CONSUMPTION** : 2880 Nlit per min at 6 BAR.
- WORKING PRESSURE** : 4-6 BAR.
- MAX SUPPLY PRESSURE** : 7 BAR.
- MAX VACUUM** : -0.9 BAR at 6 BAR
- MAX VACUUM FLOW** : 9600 Nlit per min.
- WORKING TEMP.** : -20°C + 80°C.
- WEIGHT** : 9500 g.
- NOISE LEVEL** : 72 db(A) at full flow.
- MATERIALS** : Epoxy painted AL, brass, silicon rub, neoprene, stainless steel.

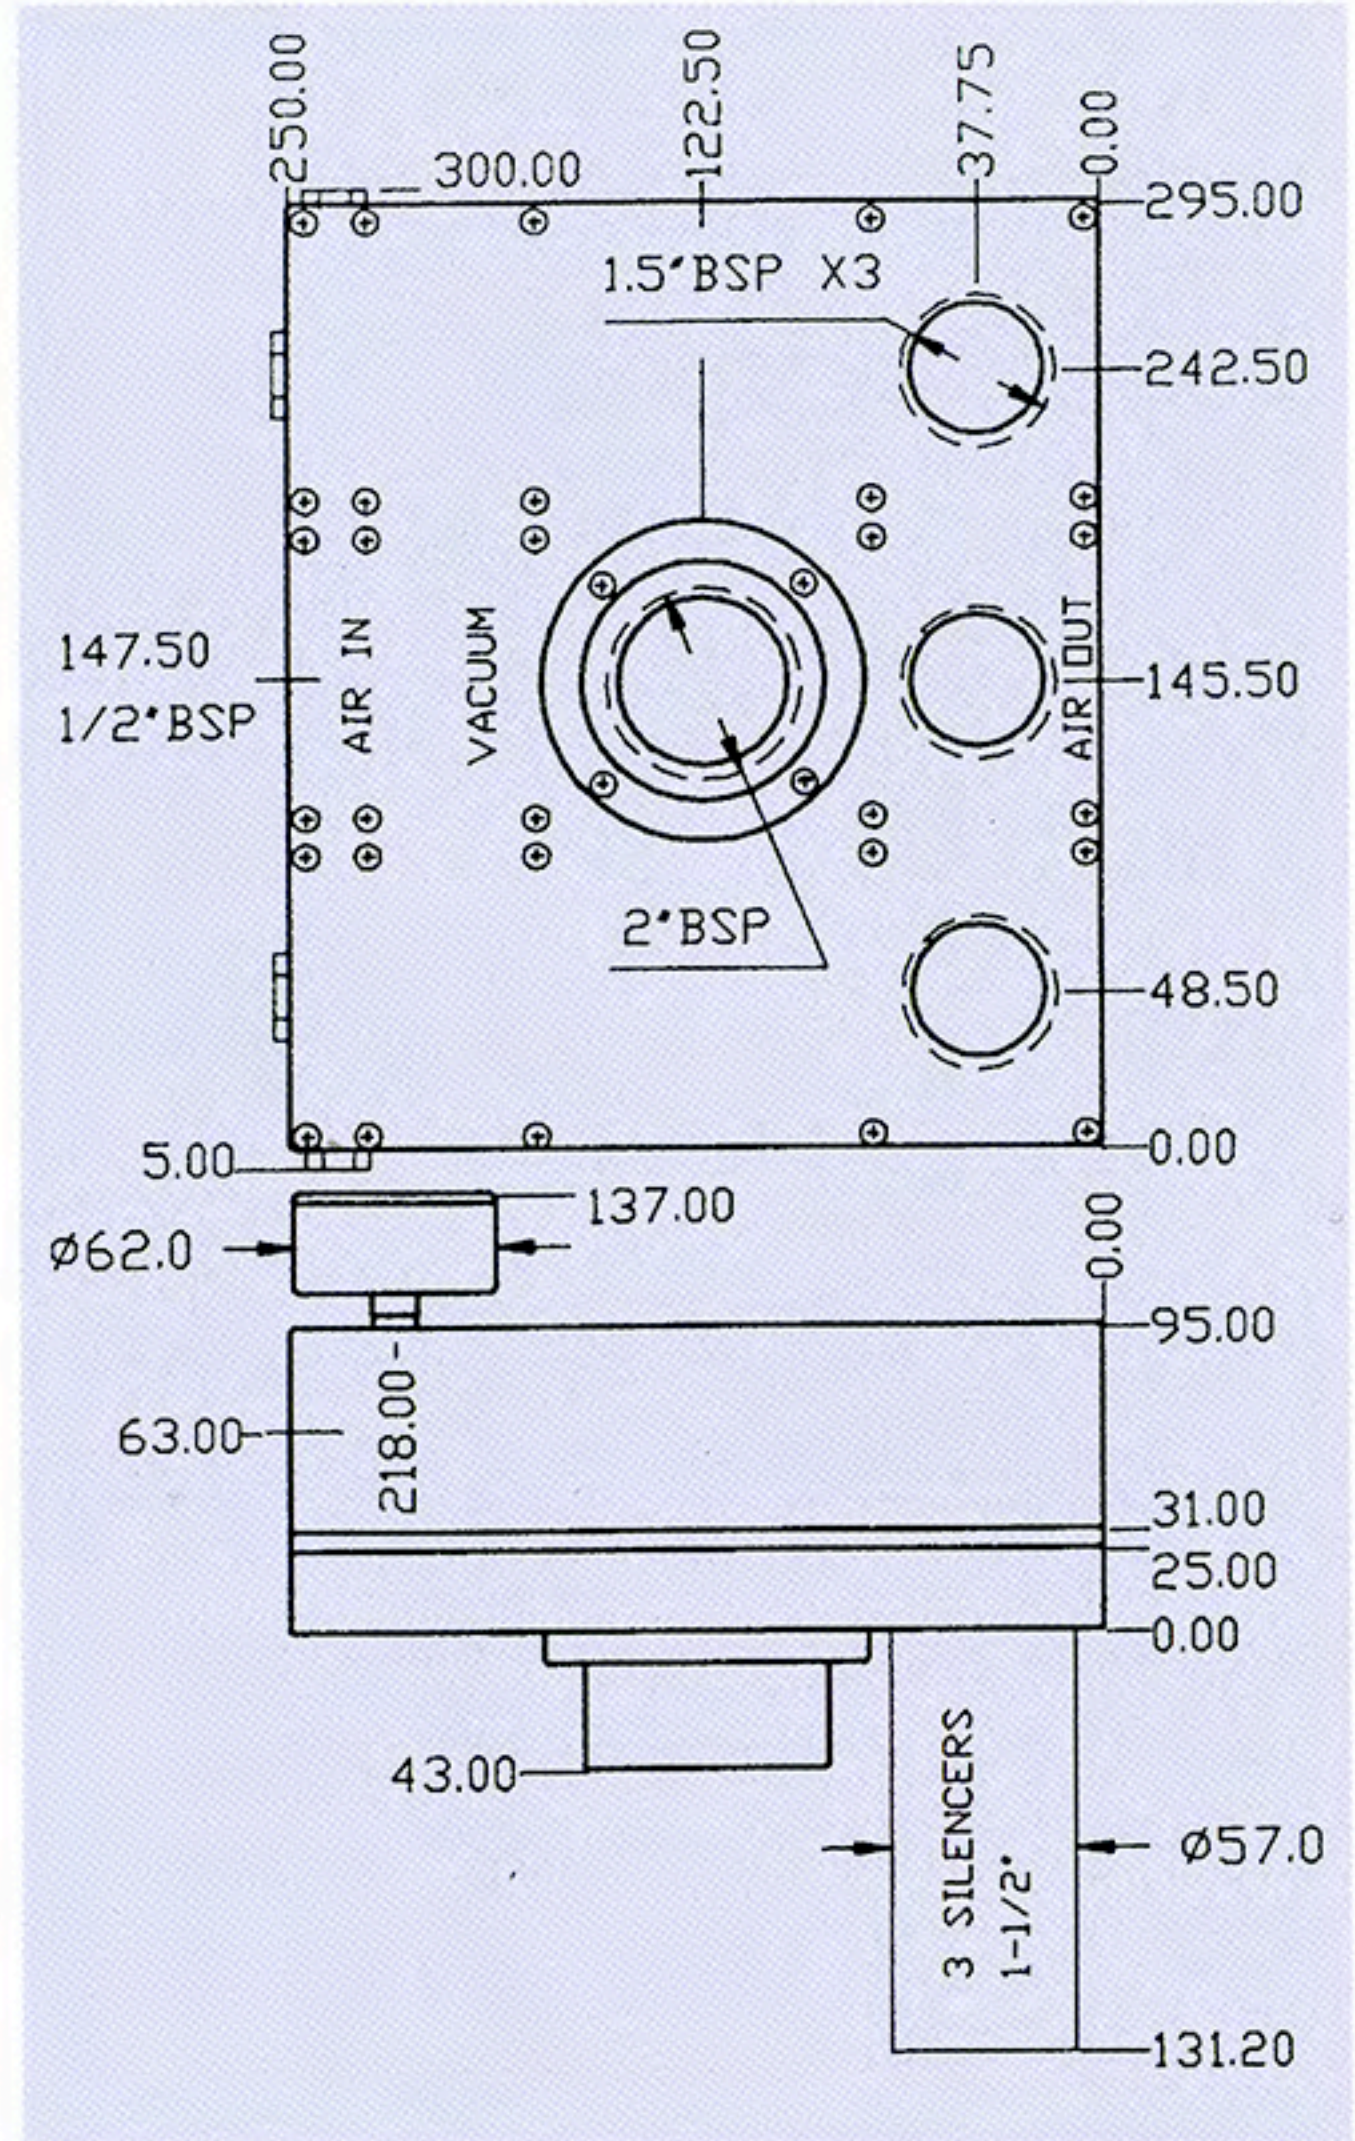

NOTE:

VILP Pumps are often used for high flow vacuum needs in porous materials, cartons, and pressed wood.

AIR AT 6 BAR

vacuum in - BAR	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
time in millisec for evacuation of 1 lit to vac' level VILP - 128	0.58	1.36	3.0	7.6	13.7	21	35	60	221

vacuum in - BAR	0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
vacuum flow lit per min, at cm of Hg vacuum VILP - 128	9600	6700	4450	2240	1590	1260	950	630	380

