

VILP-16 LOW VACUUM PUMP

AIR CONSUMPTION : 250-350 Nlit per min.

WORKING PRESSURE : 4-6 BAR.

MAX SUPPLY PRESSURE : 7 BAR.

MAX VACUUM : -0.9 BAR at 6 BAR,
at 5-6 BAR.


MAX VACUUM FLOW : 1050 lit per min.

WORKING TEMP. : -10°C + 100°C.

WEIGHT : 2500 g.

NOISE LEVEL : 75 db(A) at full flow.

MATERIALS : Epoxy painted AL, brass,
neoprene, stainless steel.

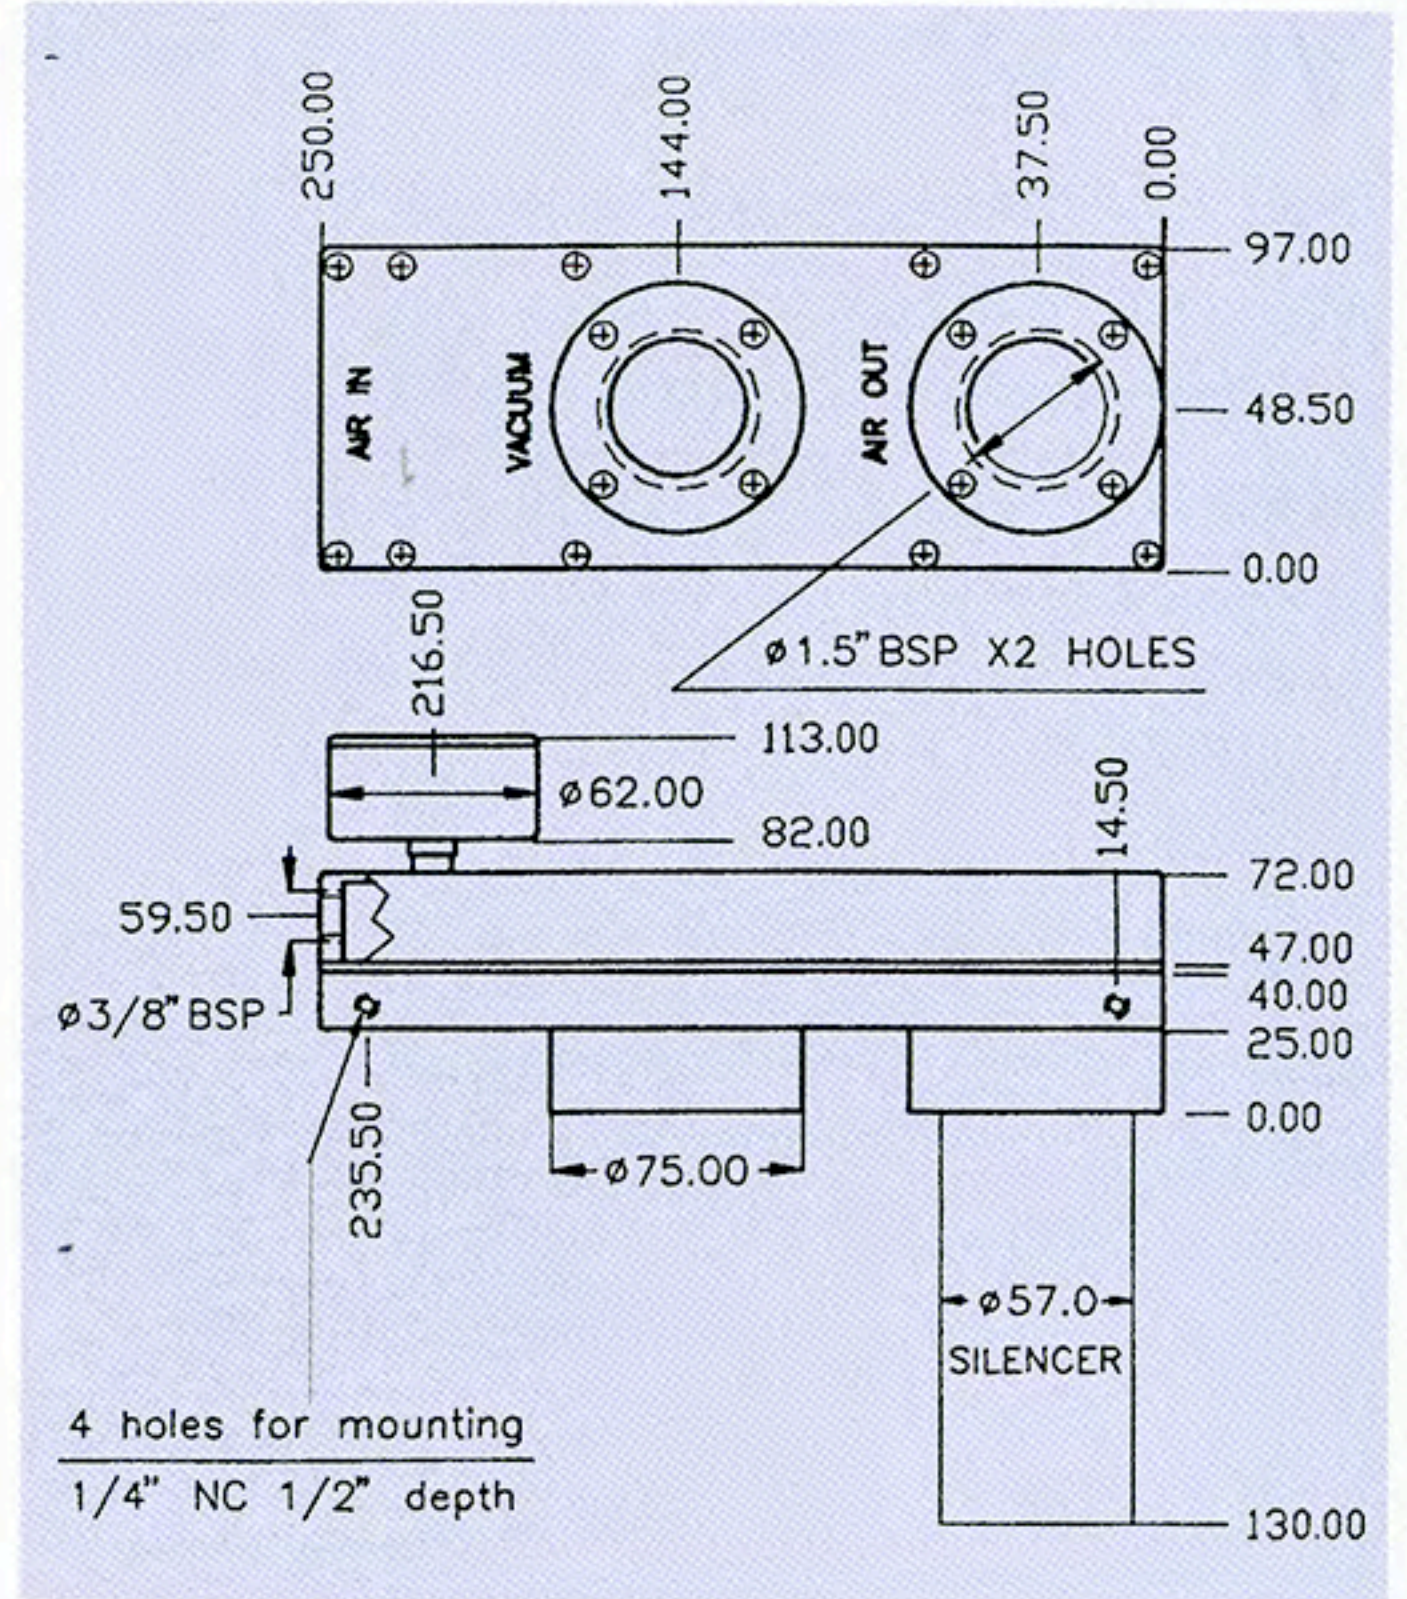

NOTE:

VILP Pumps are often used for high flow vacuum needs in porous materials, cartons, and pressed wood.

AIR AT 6 BAR

vacuum in - ATM	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
time in sec for evacuation of 1 lit to vac' level VILP - 16	.006	0.02	0.04	0.08	0.13	0.2	0.35	0.52	1.7

vacuum in - ATM	0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
vacuum flow lit per min, at -ATM vacuum VILP - 16	1050	680	420	260	180	150	100	50	25

