

VILP-48 HIGH VACUUM HIGH FLOW

AIR CONSUMPTION : 950 lNit per min at 6 BAR.

WORKING PRESSURE : 4-6 BAR.

MAX SUPPLY PRESSURE : 7 BAR.

MAX VACUUM : -0.9 BAR at 6 BAR


MAX VACUUM FLOW : 3200 lit per min.

WORKING TEMP. : -20°C + 80°C.

WEIGHT : 3200 g.

NOISE LEVEL : 72 db(A) at full flow.

MATERIALS : Epoxy painted AL, brass, silicon rub, neoprene, stainless steel.

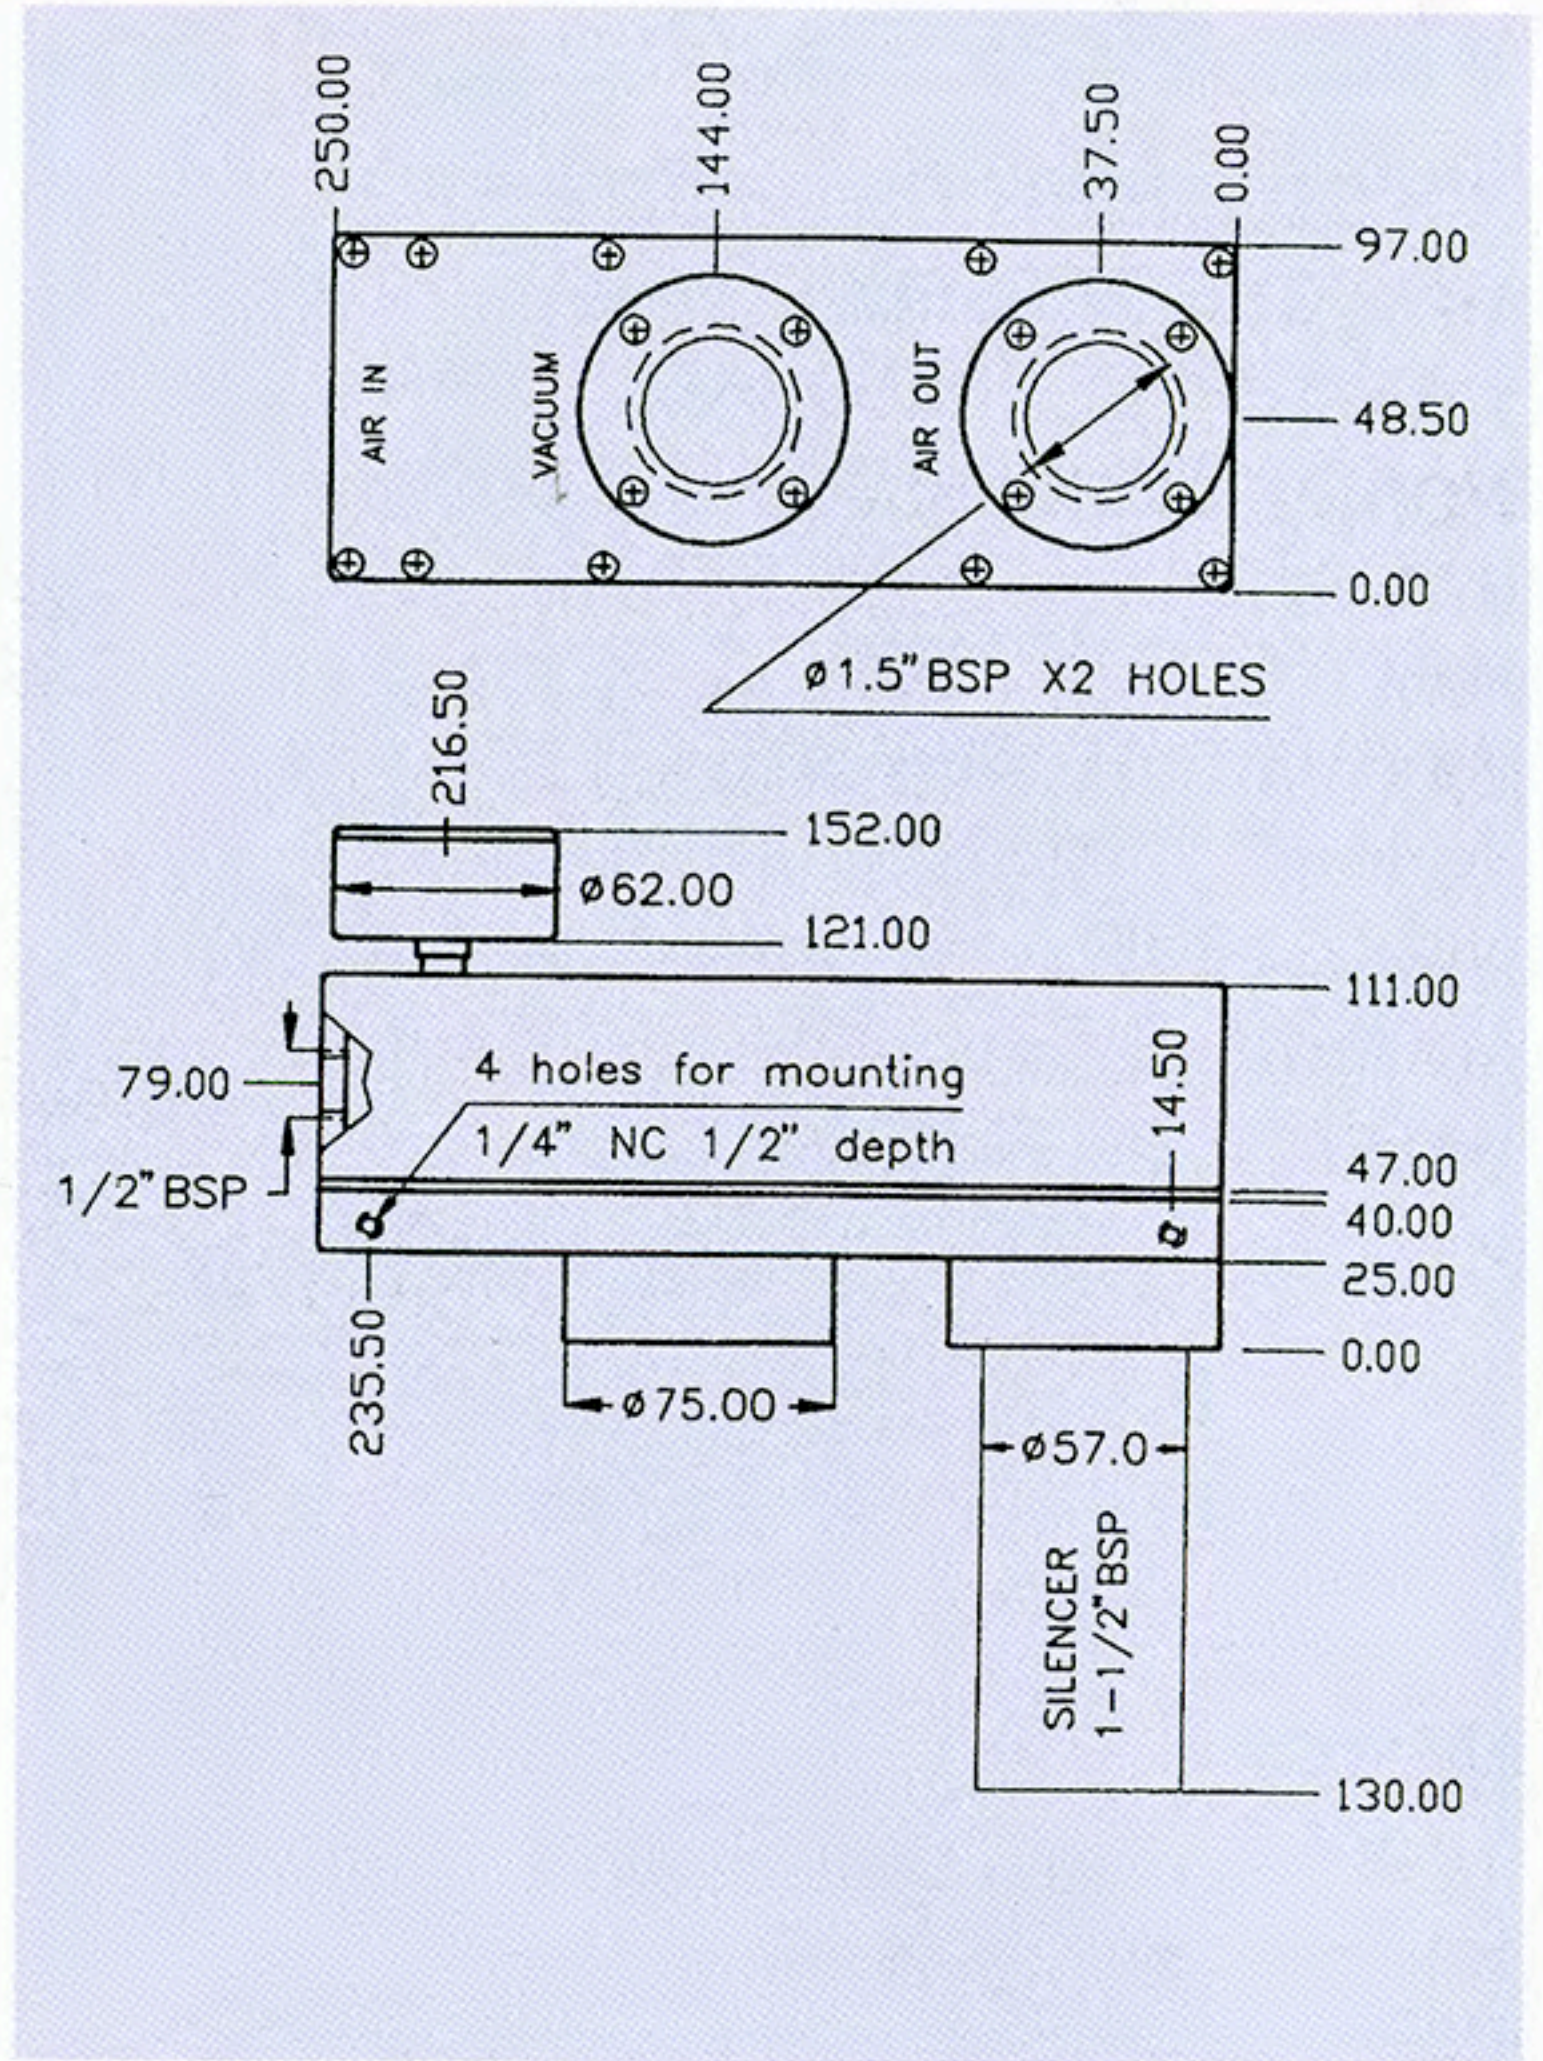

NOTE:

VILP Pumps are often used for high flow vacuum needs in porous materials, cartons, and pressed wood.

AIR AT 6 BAR

vacuum in - BAR	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
time in milisec for evacuation of 1 lit to vac' level VILP - 48	1.54	3.60	8	20	36	56	92	160	590

vacuum in - BAR	0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
vacuum flow lit per min, at cm of Hg vacuum VILP - 48	3200	2240	1480	750	530	420	320	210	125

