


## VIP-128 INTENSIVITY VACUUM PUMP

- AIR CONSUMPTION** : 2250 lit per min at 4 BAR.
- WORKING PRESSURE** : 4-5 BAR.
- MAX SUPPLY PRESSURE** : 7 BAR.
- MAX VACUUM** : -0.9 BAR at 4 BAR
- MAX VACUUM FLOW** : 7200 Nlit per minat 6 BAR,  
5700 Nlit per min at 4 BAR.
- WORKING TEMP.** : -20°C + 80°C.
- WEIGHT** : 9500 g.
- NOISE LEVEL** : 72 db(A) full vacuum.
- MATERIALS** : Epoxy painted AL, brass,  
silicon rub, neoprene, stainless steel.

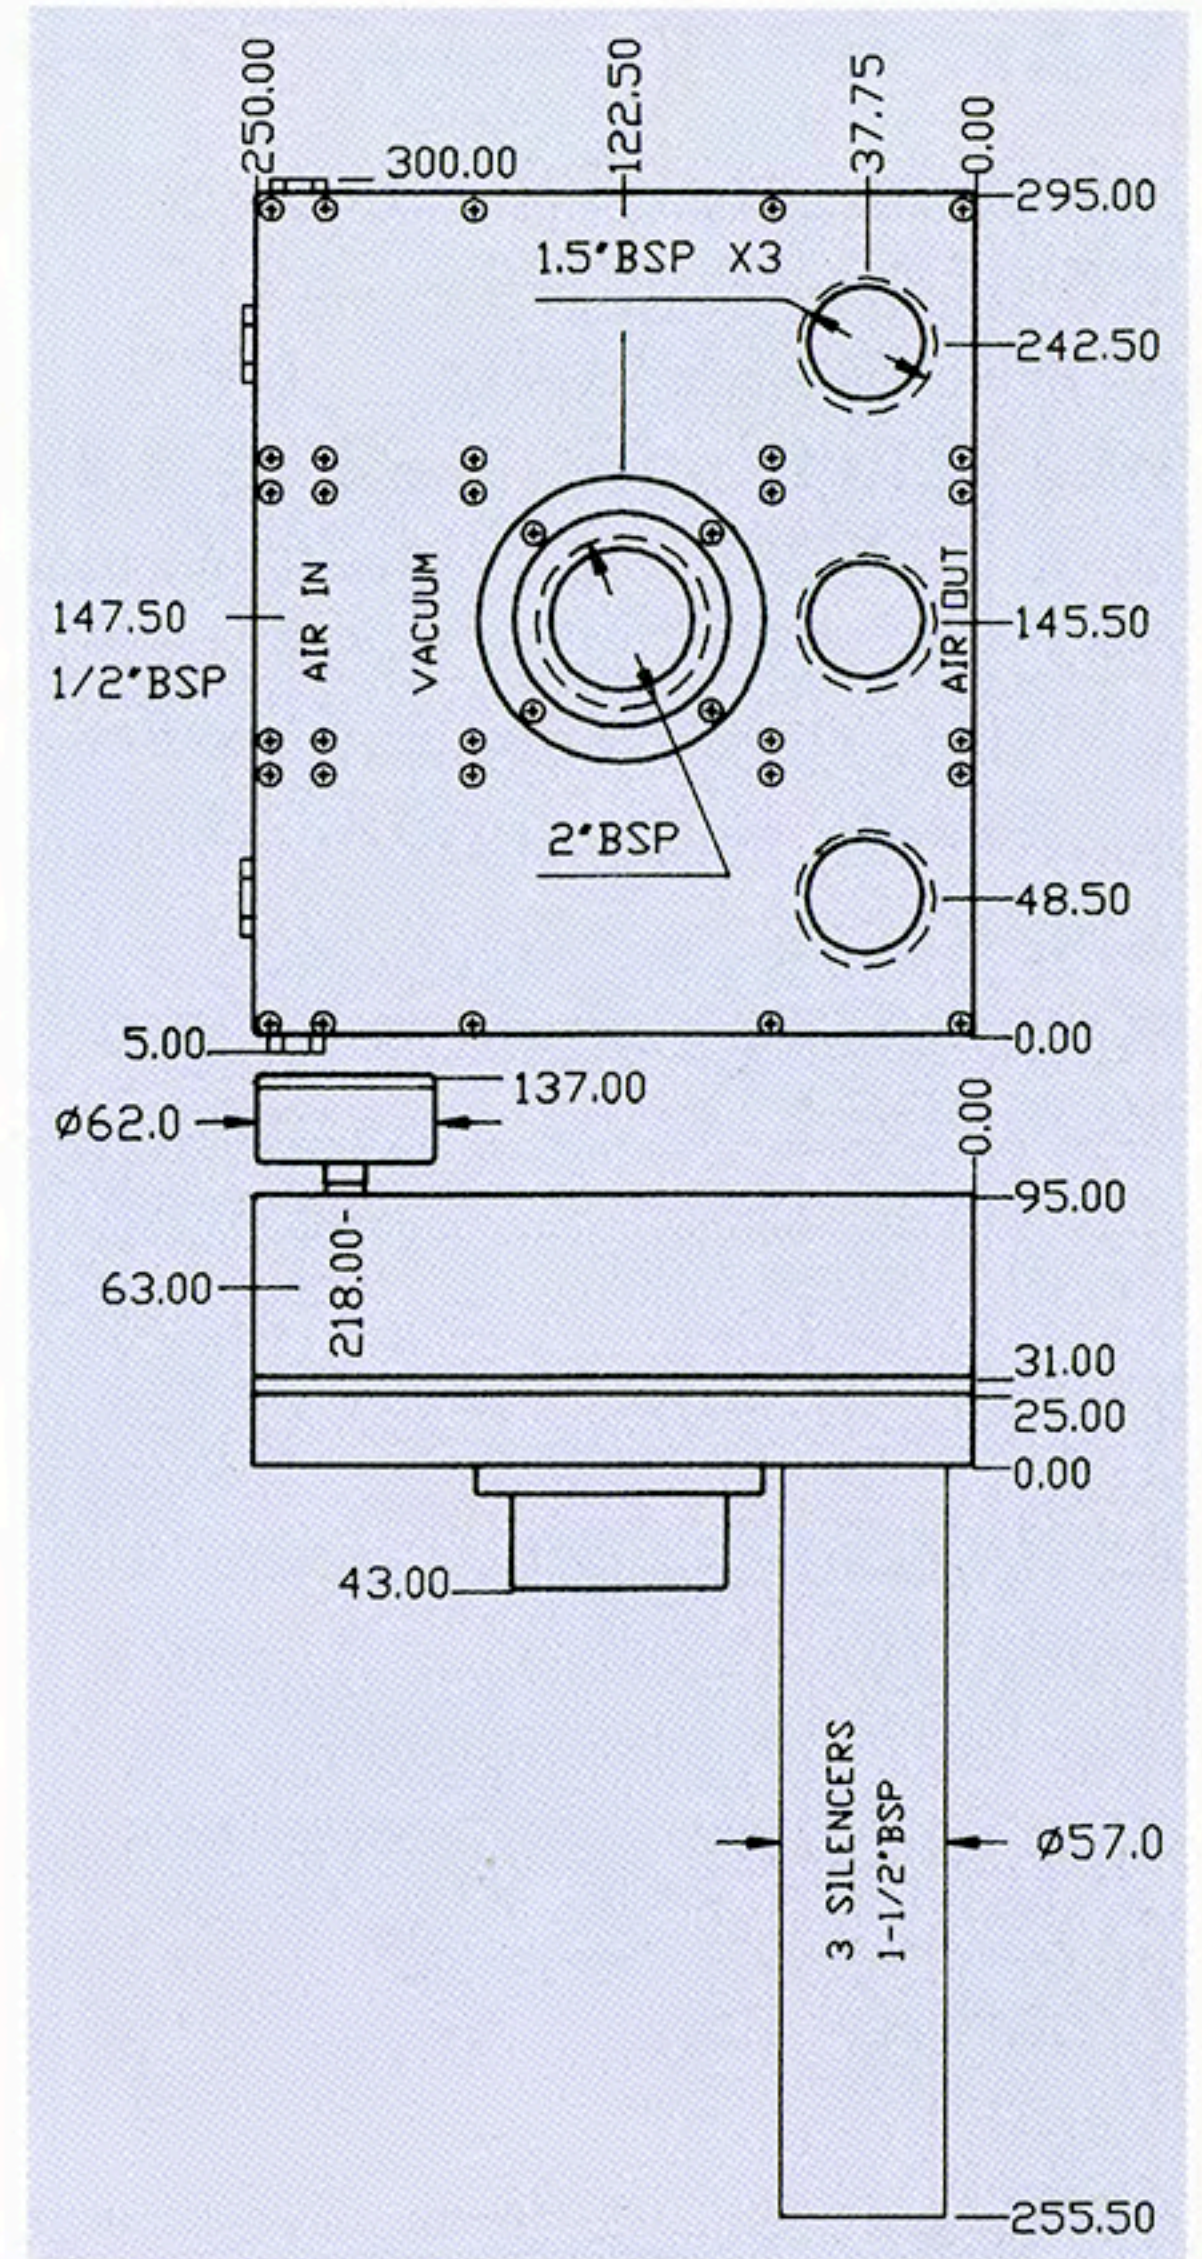

### NOTE:

VIP Pumps are often used for handling materials or clamping small parts. When needed high evacuation flow and deep vacuum us needed. It cuts time for volume evacuation.

### AIR AT 4 BAR

vacuum in - BAR	0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.9
time in sec for evacuation of 1 lit to vac' level VIP - 128	-	1	3.4	10	17	30	57	80	470

vacuum in - BAR	0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
induced air in lit per min. VIP - 128	5700	3890	2160	972	522	450	360	234	117

