



## SLP-25 STRAIGHT LINE VACUUM PUMP

**AIR CONSUMPTION** : 38 lit per min at 6 BAR.  
**WORKING PRESSURE** : 6 BAR.  
**MAX SUPPLY PRESSURE** : 8 BAR.  
**MAX VACUUM** : -0.9 ATM at 6 BAR.  
**MAX VACUUM FLOW** : 14 lit per min at 6 BAR.  
**WORKING TEMP.** : 0°C + 80°C.  
**WEIGHT** : 25 g.  
**NOISE LEVEL** : 65 db(A) full flow, 60 db(A) full vac.  
**INLET PIPE** : Ø 6.0 mm.  
**VACUUM PIPE** : Ø 6.0 mm.

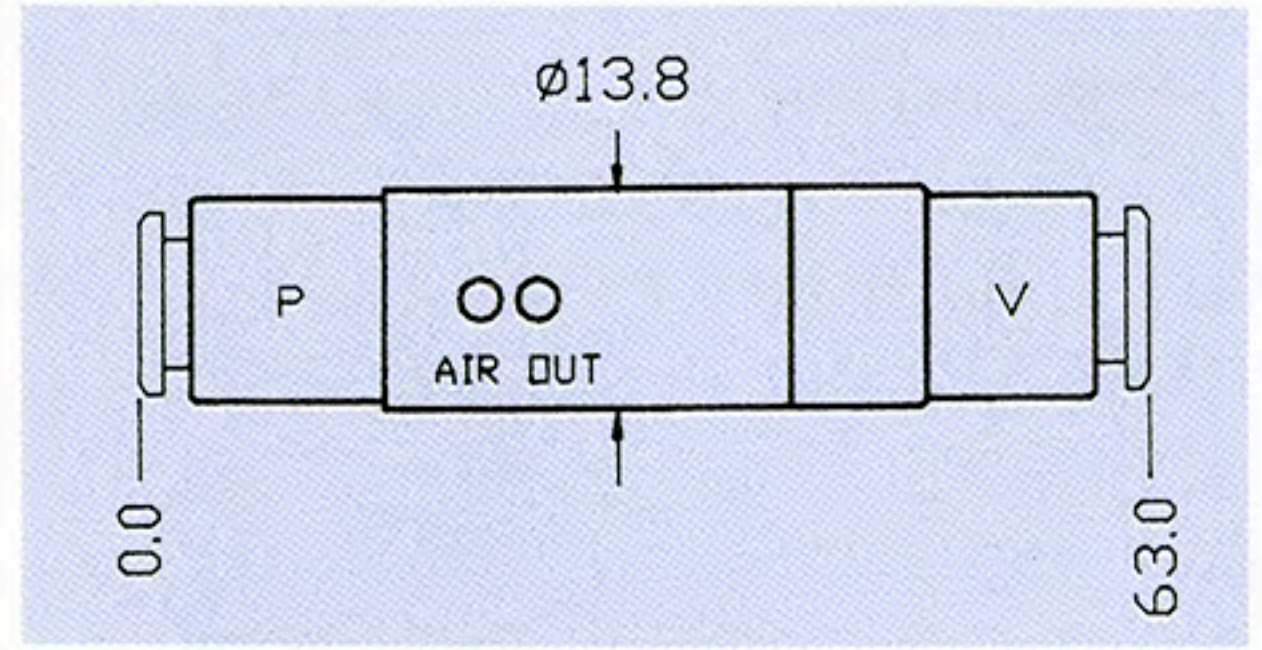

## SLP-25T STRAIGHT LINE VACUUM PUMP

**AIR CONSUMPTION** : 38 lit per min at 6 BAR.  
**WORKING PRESSURE** : 6 BAR.  
**MAX SUPPLY PRESSURE** : 8 BAR.  
**MAX VACUUM** : -0.9 ATM at 6 BAR.  
**MAX VACUUM FLOW** : 14 lit per min at 6 BAR.  
**WORKING TEMP.** : 0°C + 80°C.  
**WEIGHT** : 25 g.  
**NOISE LEVEL** : 65 db(A) full flow, 60 db(A) full vac.  
**INLET PIPE** : Ø 6.0 mm.  
**VACUUM PIPE** : Ø 6.0 mm.  
**AIR OUT** : Ø 6.0 mm.

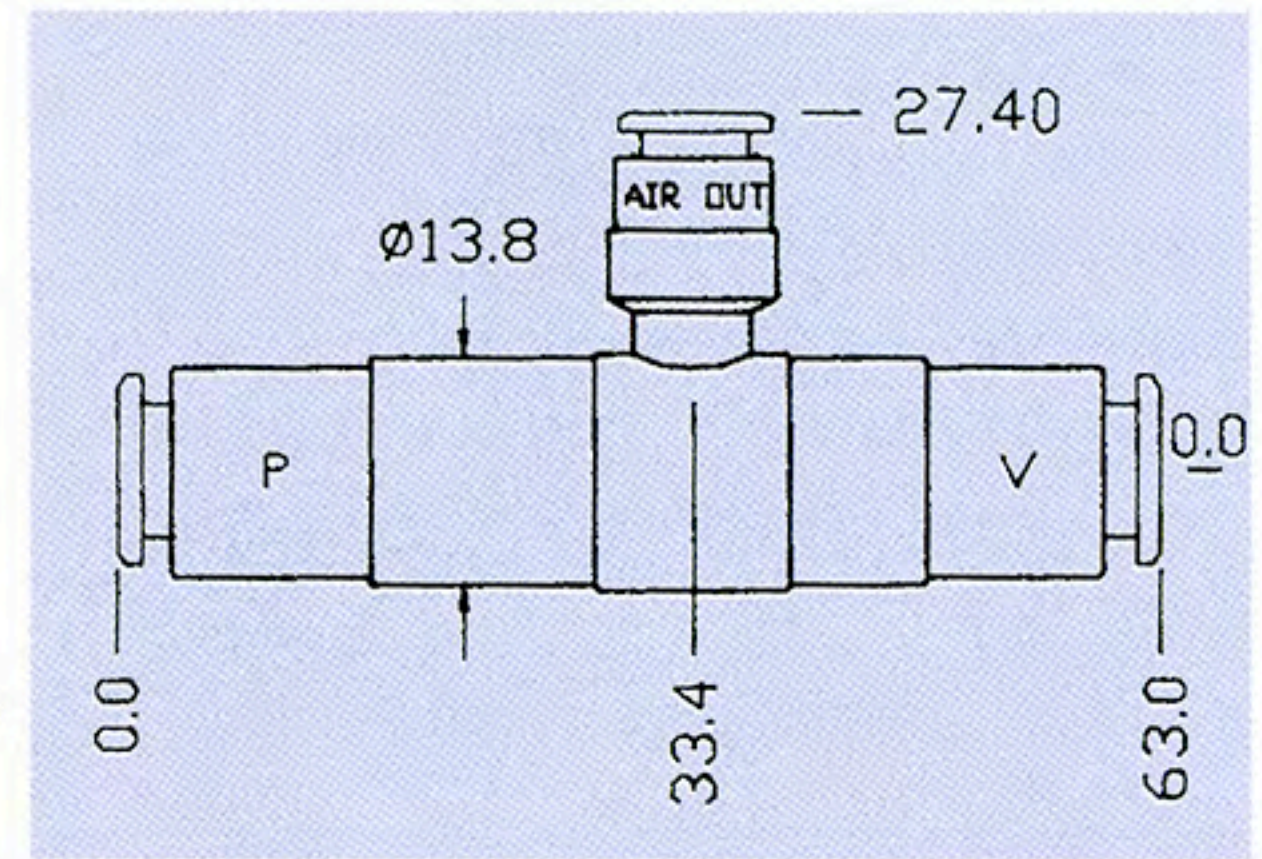

### NOTE:

SLP Pumps are often used for handling materials or clamping small parts. They can be used with suction cup. Try to minimize the distance between pump and cup.

AIR AT 6 BAR

vacuum in - BAR	0	0.1	0.2	0.3	0.4	0.6	0.8
Induced air in lit per min	14	13.3	12.5	11	8.2	4.2	1.3

