

VILP-96 HIGH VACUUM HIGH FLOW

AIR CONSUMPTION : 1900 Nlit per min at 6 BAR.

WORKING PRESSURE : 4-6 BAR.

MAX SUPPLY PRESSURE : 7 BAR.

MAX VACUUM : -0.9 BAR at 6 BAR

MAX VACUUM FLOW : 6400 lit per min.

WORKING TEMP. : -20°C + 80°C.


WEIGHT : 6500 g.

NOISE LEVEL : 72 db(A) at full flow.

MATERIALS : Epoxy painted AL, brass, silicon rub, neoprene, stainless steel.

NOTE:

VILP Pumps are often used for high flow vacuum needs in porous materials, cartons, and pressed wood.

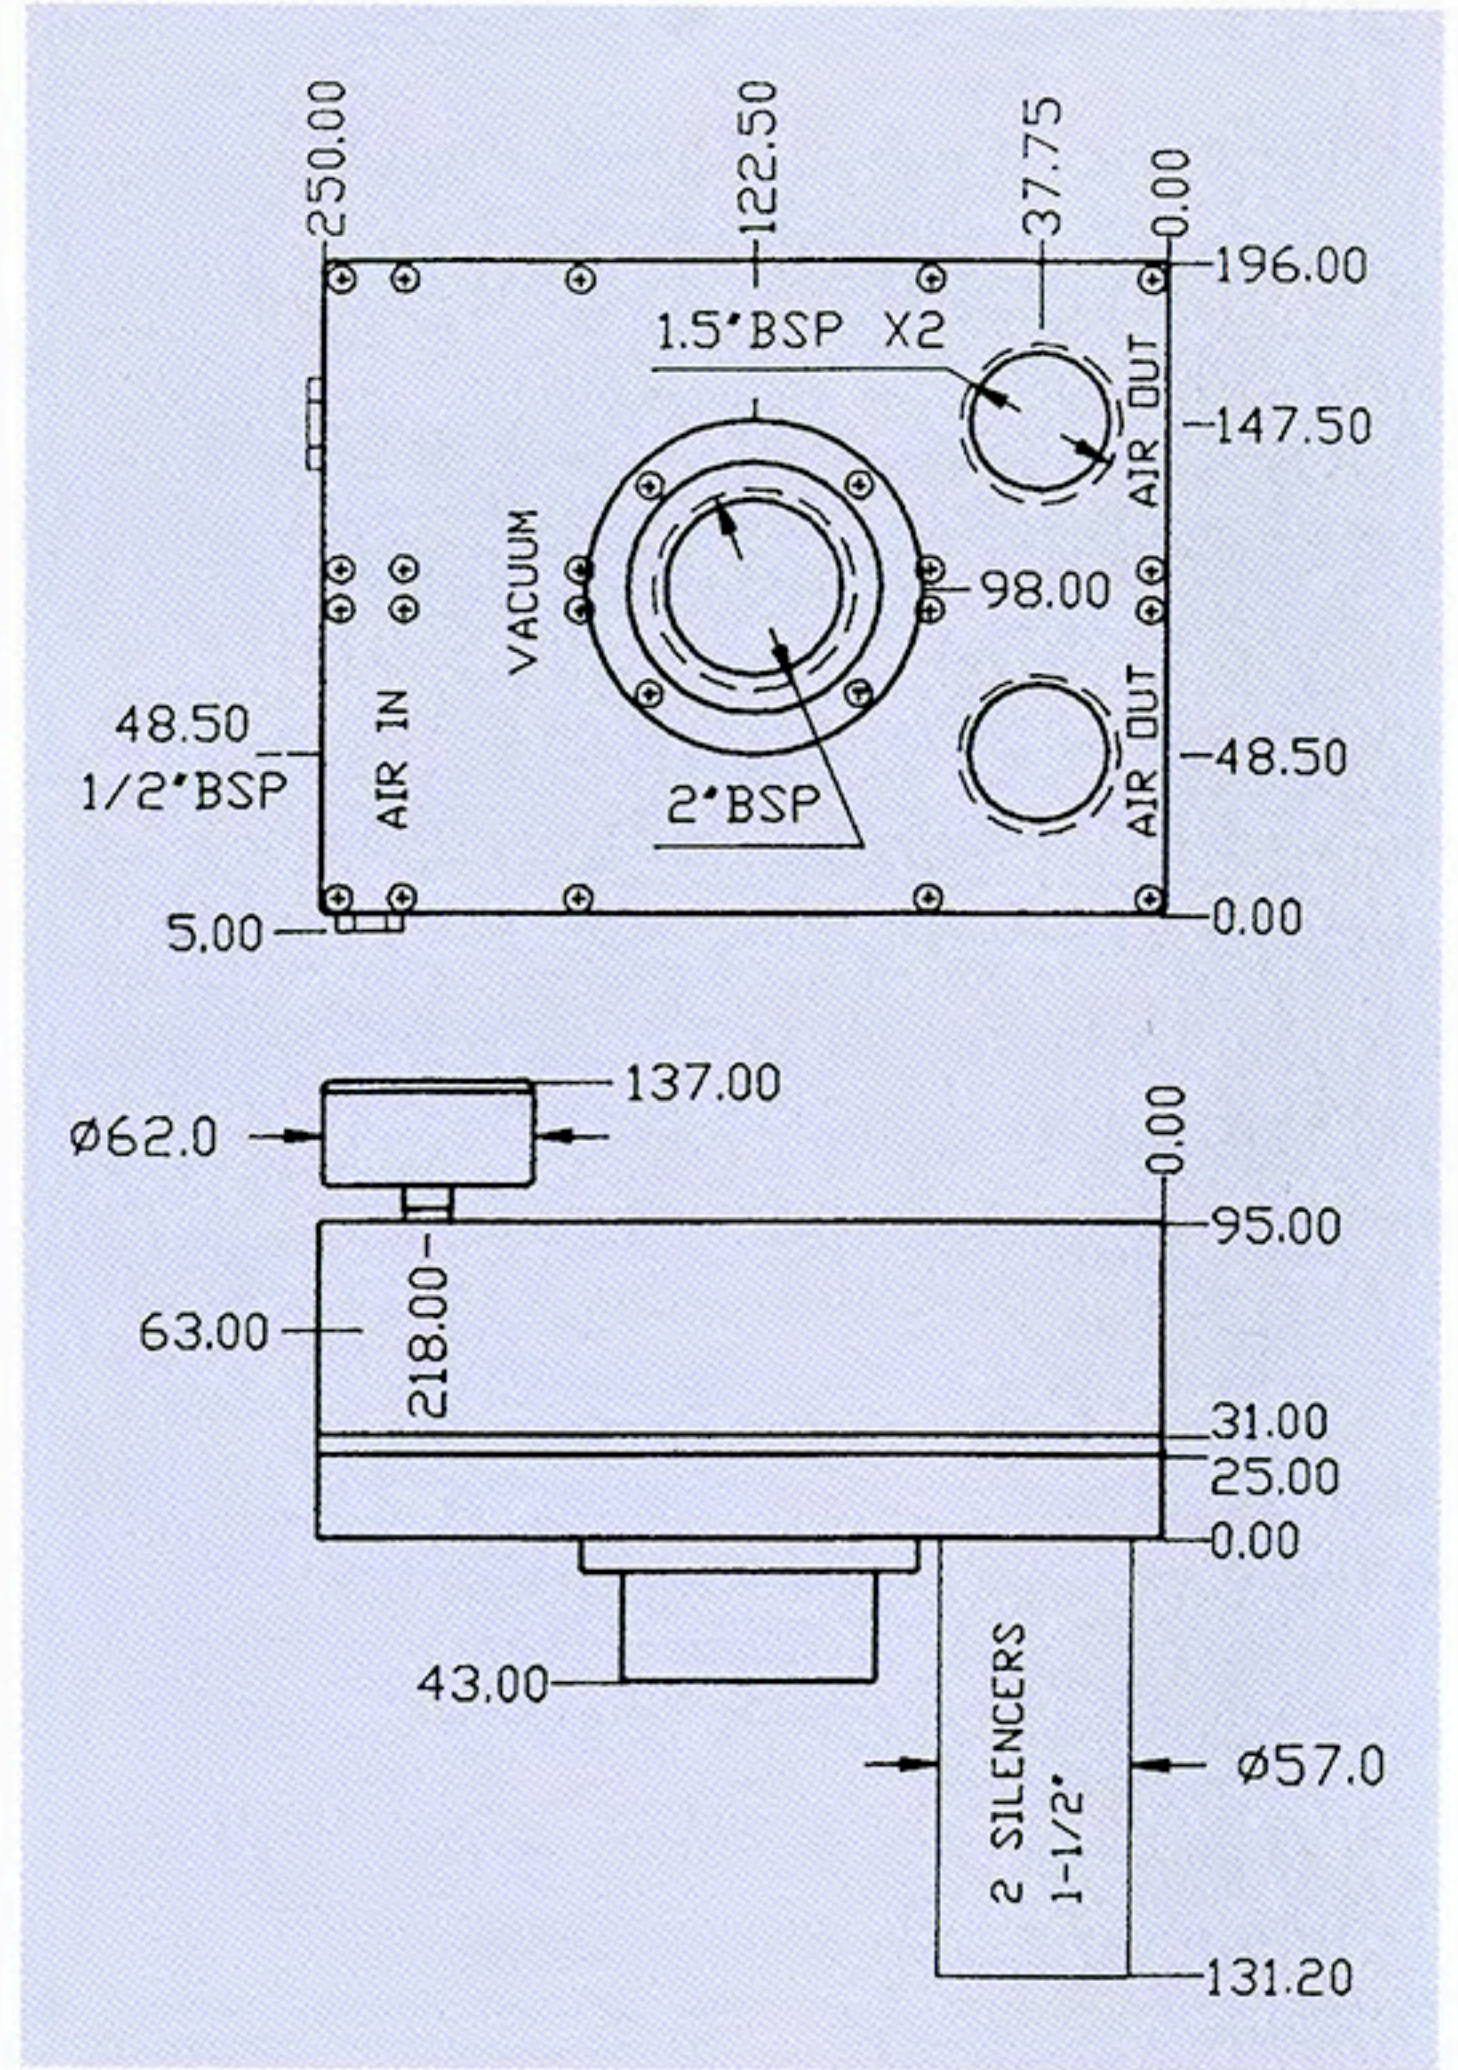

AIR AT 6 BAR

vacuum in - BAR	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
time in sec for evacuation of 1 lit to vac' level VILP - 96	.077	1.80	4	10	18	28	46	80	294

vacuum in - BAR	0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
vacuum flow Nlit per min, at 6 Bar vacuum VILP - 96	6400	4470	2970	1500	1060	840	640	420	250

