

## VLP-16 LOW VACUUM PUMP

**AIR CONSUMPTION** : 250-350 lit per min.

**WORKING PRESSURE** : 4-6 BAR.

**MAX SUPPLY PRESSURE** : 7 BAR.

**MAX VACUUM** : -0.7 BAR at 5-6 BAR.


**MAX VACUUM FLOW** : 1050 lit per min.

**WORKING TEMP.** : -10°C + 100°C.

**WEIGHT** : 2500 g.

**NOISE LEVEL** : 75 db(A) full flow,  
55 db(A) at max vacuum.

**MATERIALS** : Epoxy painted AL,  
brass, neoprene, stainless steel.

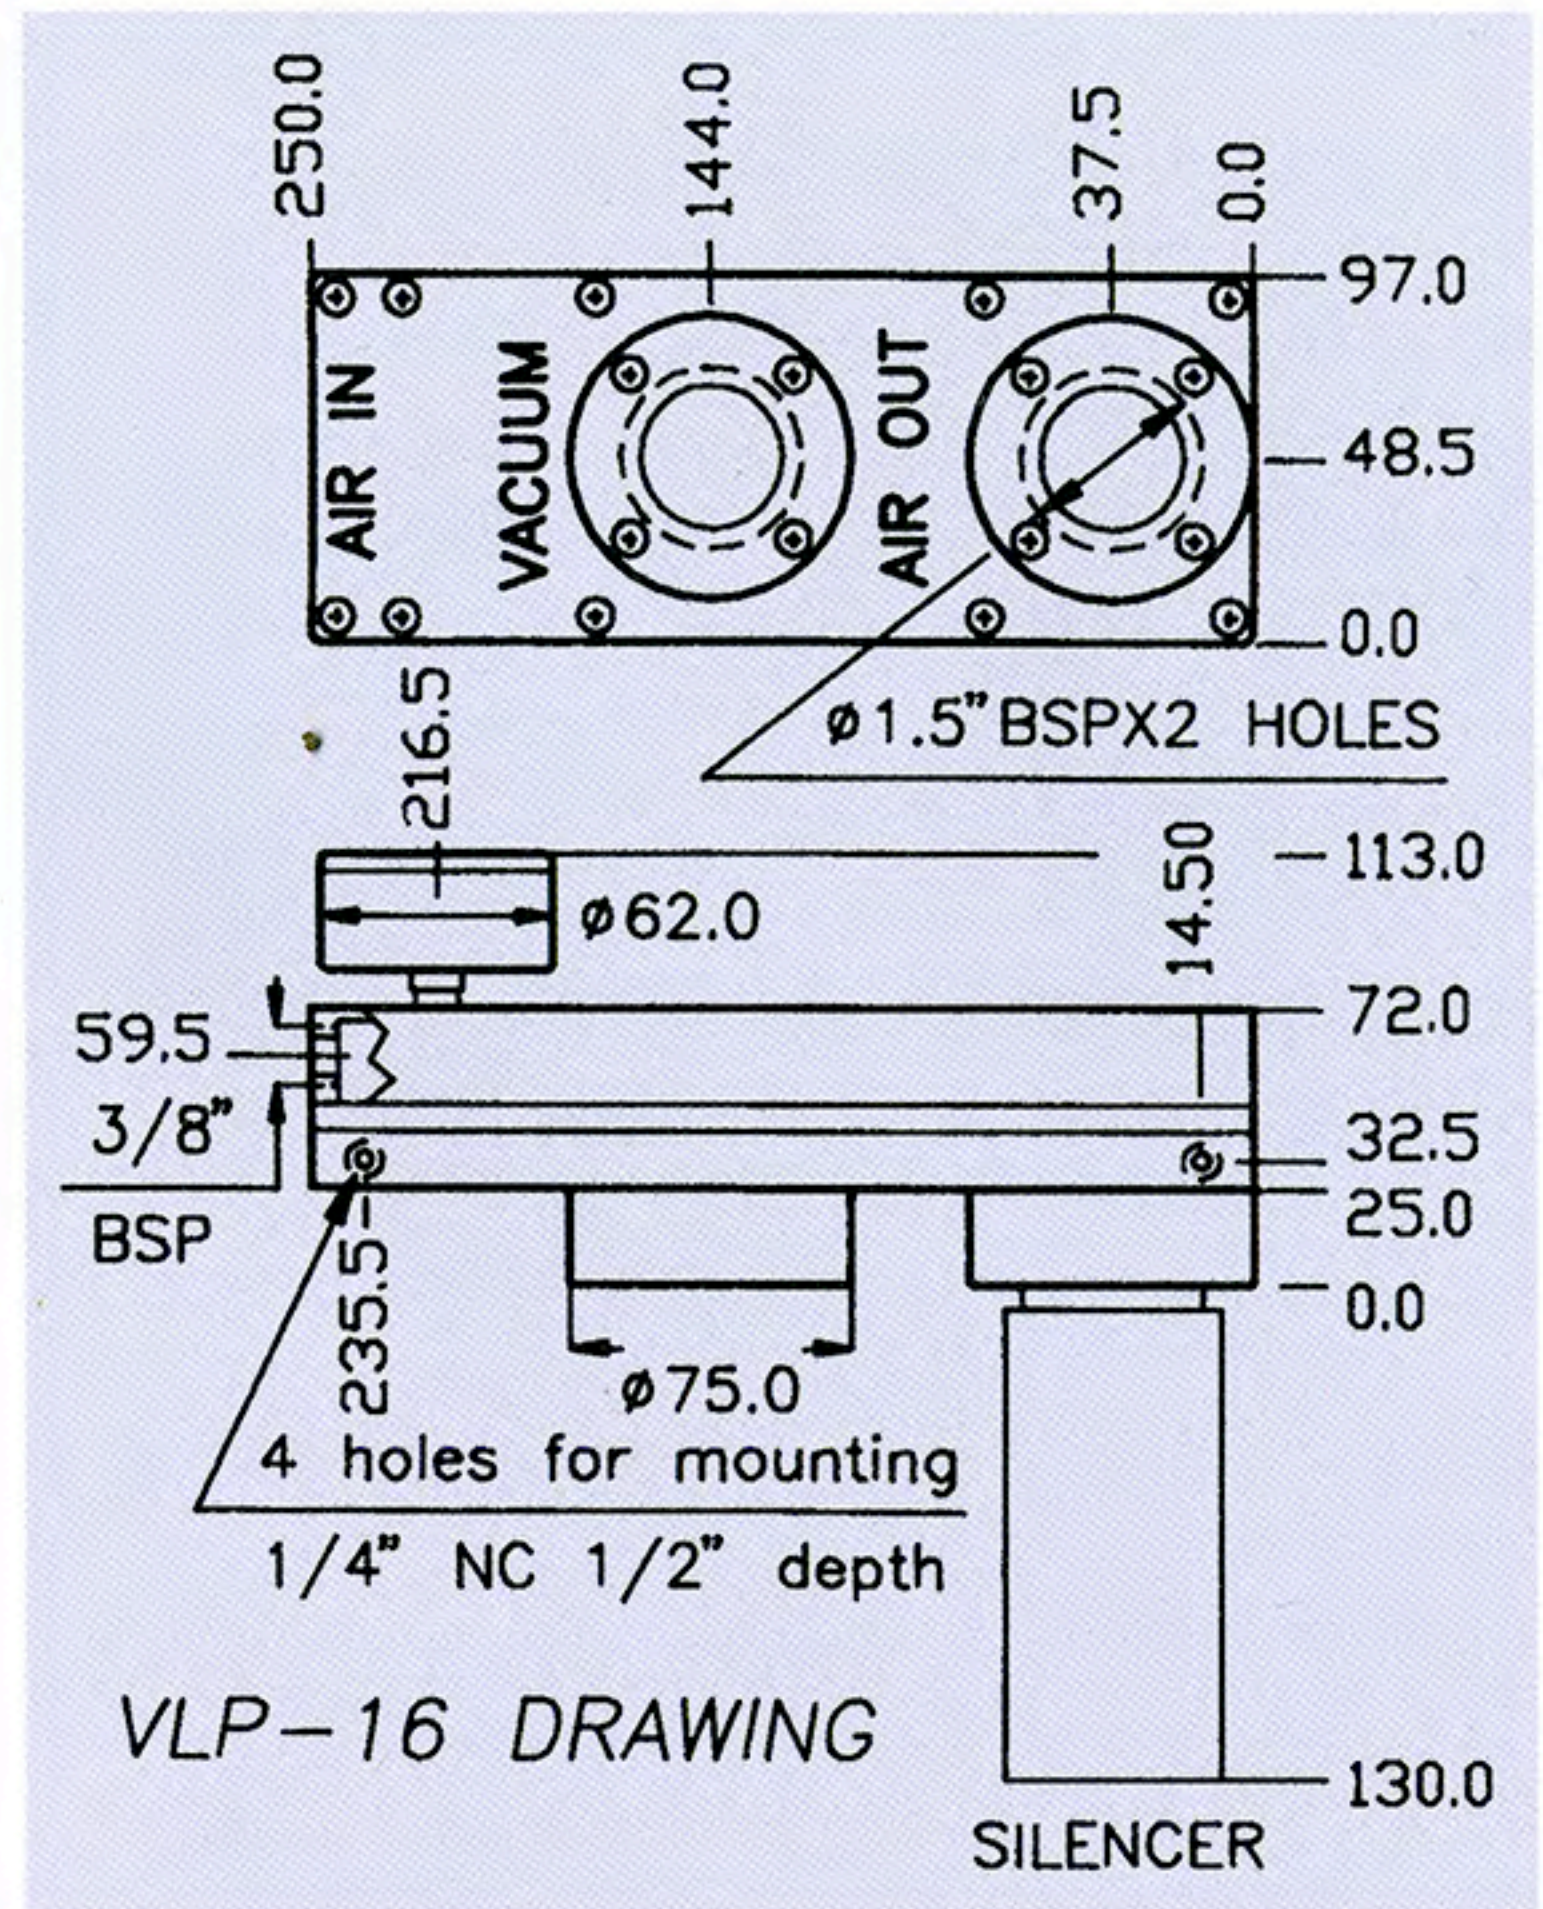

### NOTE:

VLP Pumps are often used for high flow vacuum needs in porous materials, cartons, and pressed wood.

### AIR AT 6 BAR

vacuum in - BAR	0	0.1	0.2	0.3	0.4	0.5	0.6	0.7
time in sec for evacuation of 1 lit to vac' level	-	0.006	0.02	0.04	0.08	0.13	0.2	0.35
induced air in lit per min.	1050	680	420	260	180	150	100	-

